


BodyBilt®

G2 CONTRACT COLLECTION

C A N T E R™

CANTER™

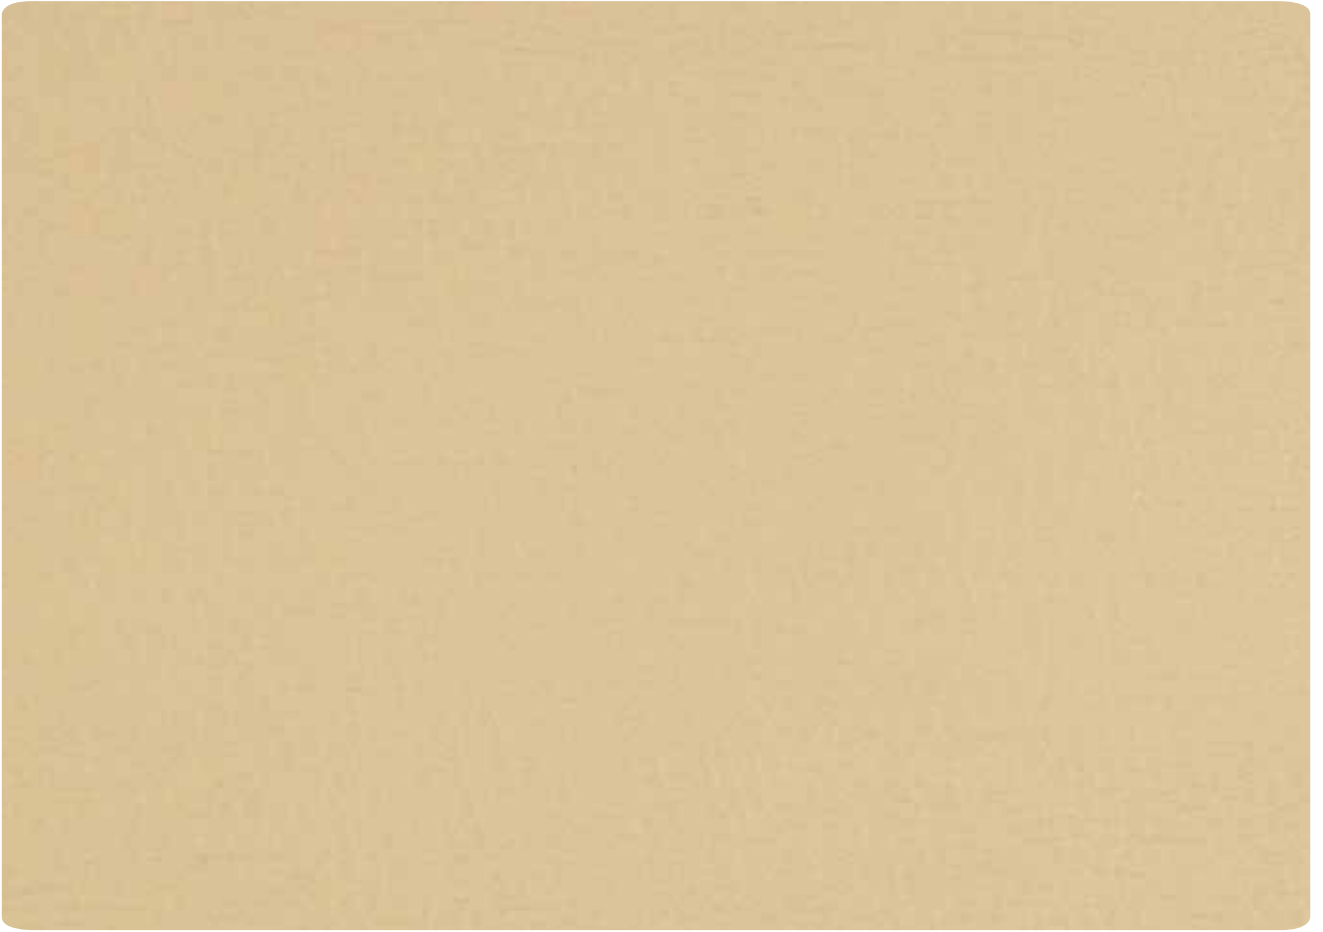

CANTER SAND



SADDLE



SAFARI



ALFALFA



SABLE



NIGHT



ONYX

TECHNICAL INFORMATION

Width - Pattern	Fiber Content & Backing	Finish	Abrasion (D.R.)	Light-fastness	Cleaning Code
54" CANTER 	100% Polyurethane / PVC Free	Anti-bacterial, Anti-microbial	240,000	40 Hrs. Class 4.5	W

*ACT® Registered Certification Marks
Patterns meet CA Bulletin 117-2013.
Primary Application: Upholstery Seating.

EXPLANATION OF ACT ICONS FOR UPHOLSTERY


COLORFASTNESS TO WET & DRY CROCKING

Colorfastness to wet & dry crocking refers to the rubbing off of color from the fabric onto clothing, hands or other materials and can occur under wet or dry conditions.

 **PASSES**
AATCC 8-1974 Dry Crocking, Class 4 minimum;
Wet Crocking, Class 3 minimum


COLORFASTNESS TO LIGHT

Colorfastness to light is the degree to which fabric will retain its color when exposed to light.

 **PASSES**
AATCC 16A-1974 or AATCC 16E-1976 Class 4 minimum at 40 hours
NOTE: Class 4 minimum at 60 hours is recommended for direct sunlight exposure situations

ABRASION

Abrasion is the ability of a fabric to withstand damage from wear and rubbing. There is a general contract specification as well as a heavy duty specification.

 **Heavy Duty** ASTM 3597 modified (#10 cotton duck); 30,000 double rubs Wyzenbeek Method or ASTM D4966 (with 21 oz. weight); 40,000 rubs Martindale Method

CLEANING CODE DEFINITIONS

W: Water-based cleaning agents or foam may be used.

BodyBilt®

ErgoGenesis, LLC
One BodyBilt Place
Navasota, TX 77868
USA
tel: 800.364.5299
tel: 936.825.1700
fax: 936.825.1725

ergoGENESIS®

REDUCED ENVIRONMENTAL IMPACT



www.BodyBilt.com
For more information, contact us at
customer-service@bodybilt.com